



Gaviota™

Product Code	Construction	Material	Weight	Thickness	Max Width 5m
TXJM	Warp-knit	100% Polyester	3.07 oz/sq.yd	0.32 mm	196 in.
 TXJM-RY			104 GSM		
 TXJM-AM					

Description

Knitted Mesh

Features

Lightweight, Great Ink Penetration, Ideal for Windy Conditions

Applications

Flags | Fencing | Signage | Events


Ink Compatibility

Dye Sub Transfer | Dye Sub Direct | UV

Cutter Compatibility

Any

Shrink (l):	1.30%	MED
Shrink (w):	1.50%	LOW
Stretch (l):	1.30%	LOW
Stretch (w):	2.80%	LOW
Stretch at Burst (l):	41.00%	LOW
Stretch at Burst (w):	63.00%	LOW
Burst Strength (l):	70 lbs/in.	LOW
Burst Strength (w):	53 lbs/in.	LOW
Tensile Strength (l):	5 lbs/in.	LOW
Tensile Strength (w):	5 lbs/in.	LOW
Burst Strength:	94 lbs	LOW
Yellowing:	_ dE	
Max Roll Length:	100m	
Available Recycled:	Yes	
Available Anti-microbial:	Yes	

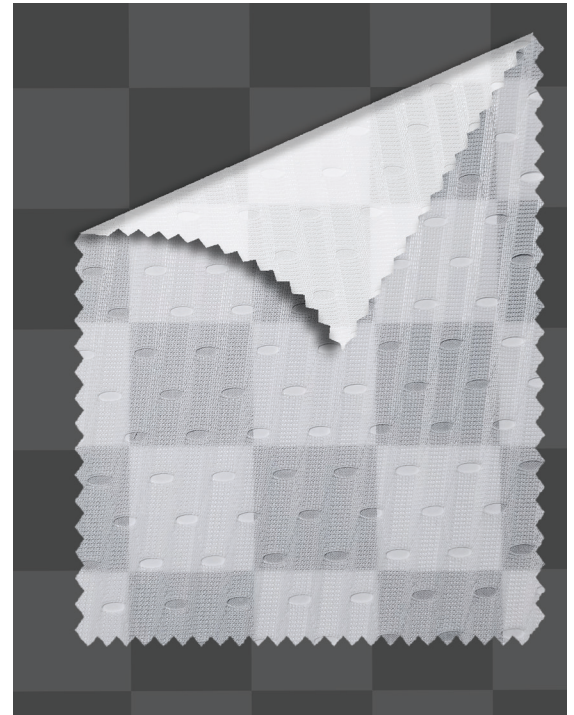

NFPA-701 flame retardance certified.
Recommended transfer settings for sublimation are
374°F-410°F for 40-100 seconds at 40psi.