



Hollister™

Product Code	Construction	Material	Weight	Thickness	Max Width
TXHK	Warp-knit	100% Polyester	9.29 oz/sq.yd	0.78 mm	126 in.
 TXHK-RY			315 GSM		
 TXHK-AM					

Description

Strong Heavy Knit Fabric

Features

Ideal for Backdrop

Applications

Flag | Banner


Ink Compatibility

Dye Sub Transfer | Dye Sub Direct | UV

Cutter Compatibility

Hot Knife / Laser Only

Shrink (l):	0.67%	LOW
Shrink (w):	0.33%	LOW
Stretch (l):	4.64%	LOW
Stretch (w):	0.8%	LOW
Stretch at Burst (l):	100.91%	MED
Stretch at Burst (w):	60.37%	LOW
Burst Strength (l):	123 lbs/in.	LOW
Burst Strength (w):	461 lbs/in.	HIGH
Tensile Strength (l):	8.05 lbs/in.	LOW
Tensile Strength (w):	18.55 lbs/in.	MED
Burst Strength:	360 lbs	HIGH
Yellowing:	_ dE	
Max Roll Length:	100m	
Available Recycled:	Yes	
Available Anti-microbial:	Yes	

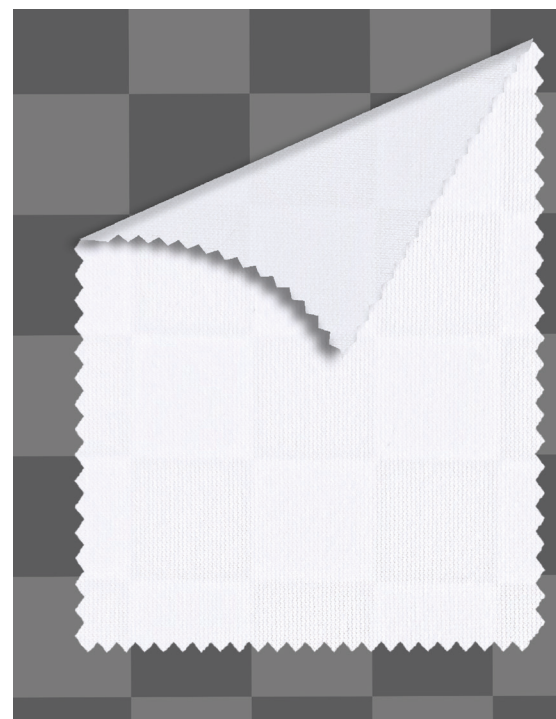

NFPA-701 flame retardance certified.
Recommended transfer settings for sublimation are
374°F-410°F for 40-100 seconds at 40psi.