

Huntington™

Product Code	Construction	Material	Weight	Thickness	Max Width
TXHF	Warp-knit	100% Polyester	4.2oz/sq.yd	0.32 mm	126 in
TXHF-RY	Warp-knit	100% Recyclable	124 GSM		
TXHF-AM	Warp-knit	100% Antimicrobial			

Description

Knitted Mesh

Features

Heavy duty flag for longer durability and outdoor applications

Applications

Feather Flags | Fencing | Flag | Events


Ink Compatibility Cutter

Dye Sub Transfer | Dye Sub Direct | UV

Print Side

Sublimation | Both

Shrink (l):	1.50%	MED
Shrink (w):	1.40%	LOW
Stretch (l):	1.30%	LOW
Stretch (w):	2.80%	LOW
Stretch at Burst (l):	41.00%	LOW
Stretch at Burst (w):	63.00%	MED
Burst Stregth (l):	183lbs/in.	LOW
Burst Strength (w):	53 lbs/in.	LOW
Tensile Strength (l):	4 lbs/in.	LOW
Tensile Strength (w):	6lbs/in.	LOW
Burst Strength:	94 lbs	MED
Yellowing:	ΔE.87	LOW
Max Roll Length:	110	
Available Recycled:	Yes	
Available Anti-microbial:	Yes	

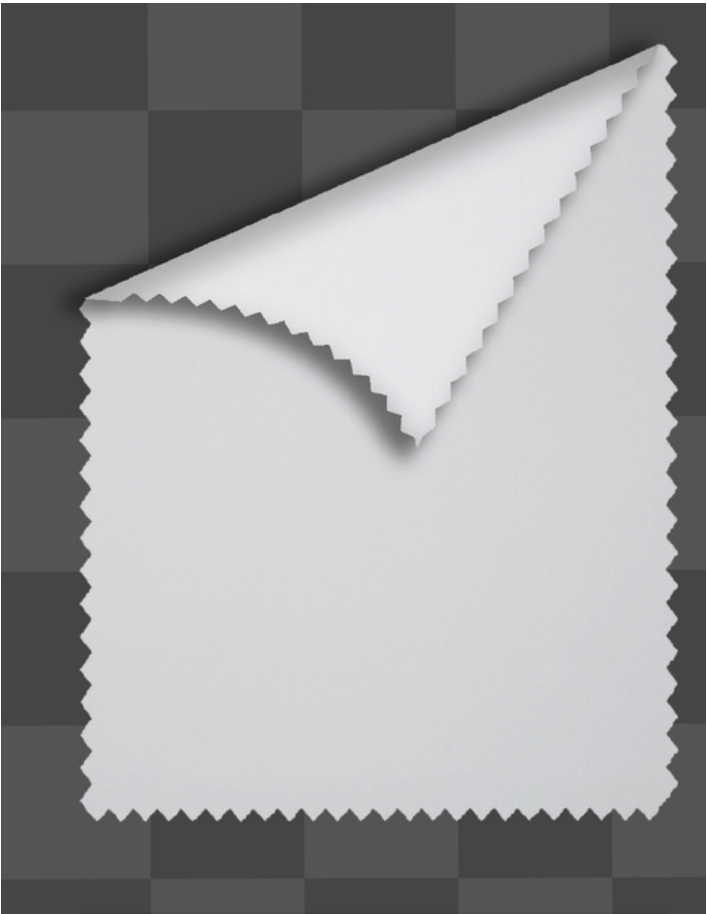

NFPA-701 flame retardance certified.
Recommended transfer settings for sublimation are
374°F-410°F for 40-100 seconds at 40psi.