



Imperial™

Product Code	Construction	Material	Weight	Thickness	Max Width 5m
TXFM	Warp-knit	100% Polyester	3.15 oz/sq.yd	0.34 mm	196 in.
 TXFM-RY			107 GSM		
 TXFM-AM					

Description

Lightweight Flag

Features

Soft Texture, Great Ink Penetration, Excellent Durability

Applications













Flag & Banner Applications


Ink Compatibility

Dye Sub Transfer | Dye Sub Direct | UV

Cutter Compatibility

Any

Shrink (l):	—	
Shrink (w):	—	
Stretch (l):	1.20%	
Stretch (w):	90.00%	
Stretch at Burst (l):	39.00%	
Stretch at Burst (w):	58.00%	
Burst Strength (l):	100 lbs/in.	
Burst Strength (w):	116 lbs/in.	
Tensile Strength (l):	5 lbs/in.	
Tensile Strength (w):	5 lbs/in.	
Burst Strength:	180 lbs	
Yellowing:	— dE	
Max Roll Length:	150m	
Available Recycled:	Yes	
Available Anti-microbial:	Yes	

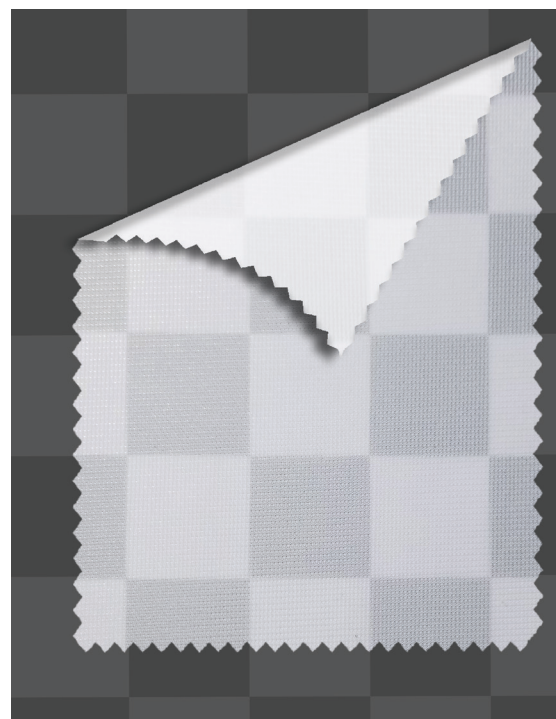

NFPA-701 flame retardance certified.

Recommended transfer settings for sublimation are
374°F-410°F for 40-100 seconds at 40psi.