



**Laguna™**

Product Code	Construction	Material	Weight	Thickness	Max Width <b>5m</b>
TXSK	Warp-knit	100% Polyester	5.16 oz/sq.yd	0.57 mm	196 in.
 TXSK-RY			175 GSM		
 TXSK-AM					

**Description**

Wrinkle-Free Soft Knit

**Features**

Super Soft And Lightweight, Two-Dimensional Stretch, Excellent Quality Printing

**Applications**













Frontlit | Backlit | Heavy-Knit Applications

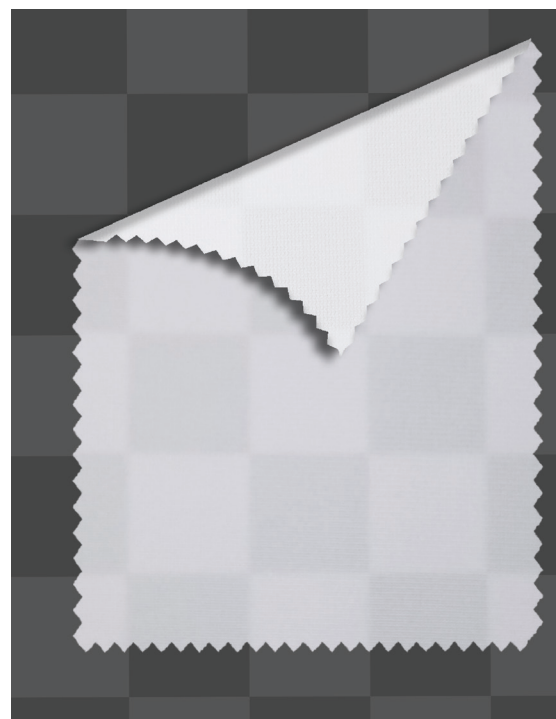
**Ink Compatibility**

Dye Sub Transfer | Dye Sub Direct | UV | Latex

**Cutter Compatibility**

Any

<b>Shrink (l):</b>	—	
<b>Shrink (w):</b>	—	
<b>Stretch (l):</b>	5.60%	
<b>Stretch (w):</b>	10.50%	
<b>Stretch at Burst (l):</b>	63.00%	
<b>Stretch at Burst (w):</b>	90.00%	
<b>Burst Strength (l):</b>	103 lbs/in.	
<b>Burst Strength (w):</b>	152 lbs/in.	
<b>Tensile Strength (l):</b>	4 lbs/in.	
<b>Tensile Strength (w):</b>	8 lbs/in.	
<b>Burst Strength:</b>	173 lbs	
<b>Yellowing:</b>	1.13 dE	
<b>Max Roll Length:</b>	150m	
<b>Available Recycled:</b>	Yes	
<b>Available Anti-microbial:</b>	Yes	



NFPA-701 flame retardance certified.  
Recommended transfer settings for sublimation are  
374°F-410°F for 40-100 seconds at 40psi.