


**Northridge™**

Product Code	Construction	Material	Weight	Thickness	Max Width
TXNEO	Circular Knit	91% Polyester, 9% Spandex	8.11 oz/sq.yd 275 GSM	1.95 mm	63 in.
TXNEO-RY					
 TXNEO-AM					

**Description**

Circular Knit→↑ Powerstretch Fabric

**Features**

Good Breathability, Soft, Anti-Yellowing, Easy Wash

**Applications**













Home Textile | Medical | Sportswear | Fashion | Face Covers


**Ink Compatibility**

Dye Sub Transfer | Dye Sub Direct | UV | Latex

**Cutter Compatibility**

Any

<b>Shrink (l):</b>	8.00%	 <b>HIGH</b>
<b>Shrink (w):</b>	4.10%	 <b>HIGH</b>
<b>Stretch (l):</b>	40.00%	 <b>HIGH</b>
<b>Stretch (w):</b>	147.00%	 <b>HIGH</b>
<b>Stretch at Burst (l):</b>	186.00%	 <b>HIGH</b>
<b>Stretch at Burst (w):</b>	249.00%	 <b>HIGH</b>
<b>Burst Strength (l):</b>	119 lbs/in.	 <b>LOW</b>
<b>Burst Strength (w):</b>	76 lbs/in.	 <b>LOW</b>
<b>Tensile Strength (l):</b>	7 lbs/in.	 <b>LOW</b>
<b>Tensile Strength (w):</b>	9 lbs/in.	 <b>LOW</b>
<b>Burst Strength:</b>	187 lbs	 <b>MED</b>
<b>Yellowing:</b>	2.9 dE	 <b>HIGH</b>
<b>Max Roll Length:</b>	50m	
<b>Available Recycled:</b>	No	
<b>Available Anti-microbial:</b>	Yes	

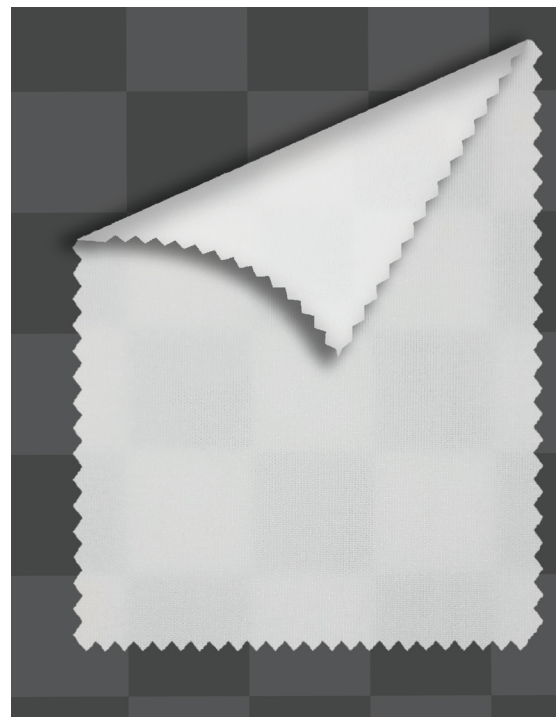

NFPA-701 flame retardance certified.

Recommended transfer settings for sublimation are  
374°F-410°F for 40-100 seconds at 40psi.