

Palisades™

Product Code	Construction	Material	Weight	Thickness	Max Width 5m
TXPFSEG	Warp-knit	100% Polyester	6.14 oz/sq.yd	0.46 mm	196 in.
 TXPFSEG-RY			208 GSM		
 TXPFSEG-AM					

Description

Prime Display Fabric

Features

Light Weight, High Opacity

Applications





Geometric | POP | SEG | Tradeshow

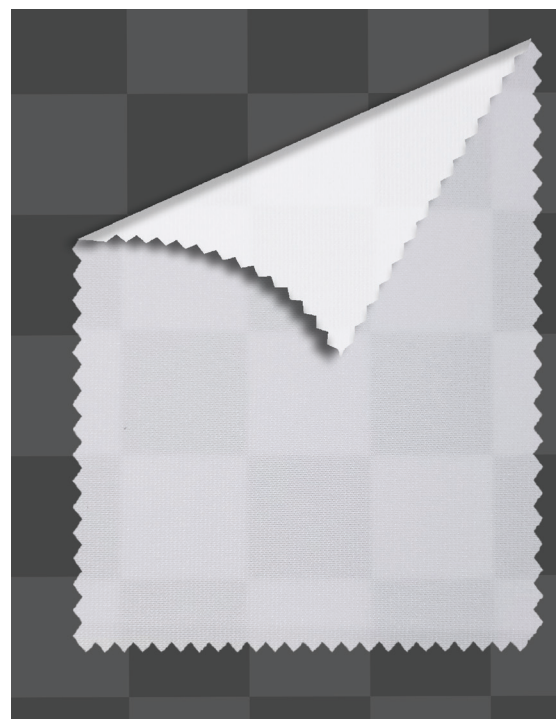
Ink Compatibility

Dye Sub Transfer | Dye Sub Direct | UV | Latex

Cutter Compatibility

Any

Shrink (l):	—	
Shrink (w):	—	
Stretch (l):	2.70%	
Stretch (w):	0.90%	
Stretch at Burst (l):	71.00%	
Stretch at Burst (w):	53.00%	
Burst Strength (l):	127 lbs/in.	
Burst Strength (w):	228 lbs/in.	
Tensile Strength (l):	5 lbs/in.	
Tensile Strength (w):	5 lbs/in.	
Burst Strength:	255 lbs	
Yellowing:	0.83 dE	
Max Roll Length:	150m	
Available Recycled:	Yes	
Available Anti-microbial:	Yes	



NFPA-701 flame retardance certified.

Recommended transfer settings for sublimation are
374°F-410°F for 40-100 seconds at 40psi.