


Pebble Beach™

Product Code	Construction	Material	Weight	Thickness	Max Width
TXUT	Woven	100% Polyester	9.43 oz/sq.yd 320 GSM	0.00 mm	126 in.
TXUT-RY					
 TXUT-AM					

Description

Upholstery Fabric

Features

Texturized Look, Elegant, Versatile For Home Decor

Applications













Upholstry | Pillows | Window Coverings | Curtains | Dv©cor


Ink Compatibility

Dye Sub Transfer | Dye Sub Direct | UV | Latex

Cutter Compatibility

Hot Knife / Laser Only

Shrink (l):	—	
Shrink (w):	—	
Stretch (l):	—	
Stretch (w):	—	
Stretch at Burst (l):	—	
Stretch at Burst (w):	—	
Burst Stregth (l):	_ lbs/in.	
Burst Strength (w):	_ lbs/in.	
Tensile Strength (l):	_ lbs/in.	
Tensile Strength (w):	_ lbs/in.	
Burst Strength:	_ lbs	
Yellowing:	_ dE	
Max Roll Length:	_m	
Available Recycled:	No	
Available Anti-microbial:	Yes	

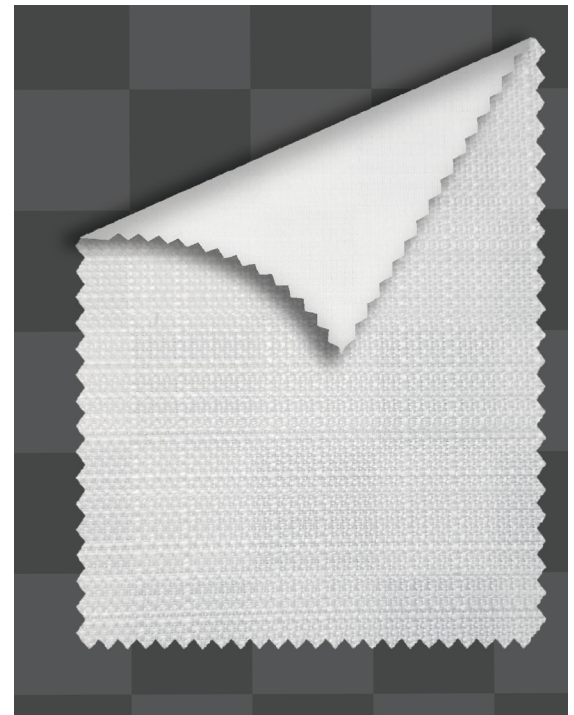

NFPA-701 flame retardance certified.
Recommended transfer settings for sublimation are
374°F-410°F for 40-100 seconds at 40psi.