


**Pismo™**

Product Code	Construction	Material	Weight	Thickness	Max Width
TXGB	—	100% Polyester	9.94 oz/sq.yd	0.98 mm	126 in.
 TXGB-RY			337 GSM		
TXGB-AM					

**Description**

Environmentally-Friendly Grey Back Fabric With Light Stretch  
Used For Indoor Displays

**Features**

Popular, Environmentally Friendly, Ideal Opacity, Great Color Definition

**Applications**

Display | Soft signs | Backdrop


**Ink Compatibility**

Dye Sub Transfer | Dye Sub Direct | UV

**Cutter Compatibility**

—

<b>Shrink (l):</b>	1.8%	<b>LOW</b>
<b>Shrink (w):</b>	0.9%	<b>LOW</b>
<b>Stretch (l):</b>	3.80%	<b>LOW</b>
<b>Stretch (w):</b>	4.00%	<b>LOW</b>
<b>Stretch at Burst (l):</b>	97.00%	<b>MED</b>
<b>Stretch at Burst (w):</b>	88.00%	<b>LOW</b>
<b>Burst Strength (l):</b>	118 lbs/in.	<b>LOW</b>
<b>Burst Strength (w):</b>	339 lbs/in.	<b>HIGH</b>
<b>Tensile Strength (l):</b>	6 lbs/in.	<b>LOW</b>
<b>Tensile Strength (w):</b>	12 lbs/in.	<b>MED</b>
<b>Burst Strength:</b>	308 lbs	<b>HIGH</b>
<b>Yellowing:</b>	0.95 dE	<b>LOW</b>
<b>Max Roll Length:</b>	100m	
<b>Available Recycled:</b>	Yes	
<b>Available Anti-microbial:</b>	No	

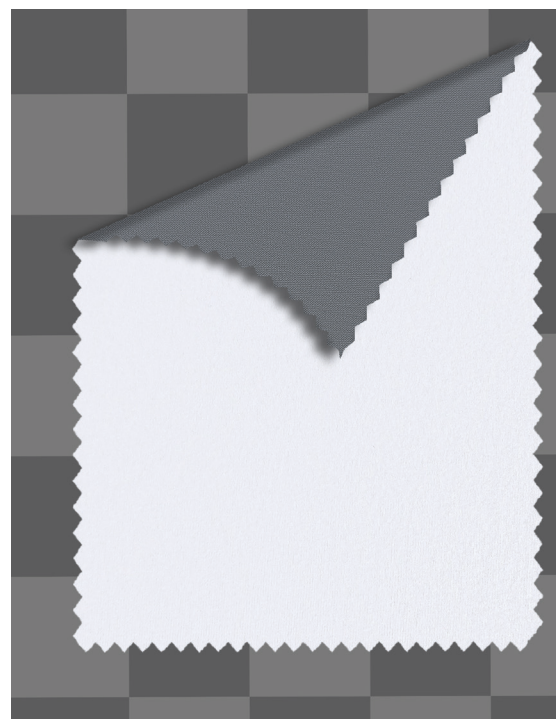

NFPA-701 flame retardance certified.  
Recommended transfer settings for sublimation are  
374°F-410°F for 40-100 seconds at 40psi.