


Redondo™

Product Code	Construction	Material	Weight	Thickness	Max Width
TXPS	Warp-knit	90% Polyester, 10% Lycra	7.61 oz/sq.yd 258 GSM	0.67 mm	126 in.
TXPS-RY					
 TXPS-AM					

Description

Powerstretch Fabric With Spandex

Features

Excellent Wrinkle Resistance , Power Stretch

Applications













Display | Banner | Popup | Blockout | Curtains

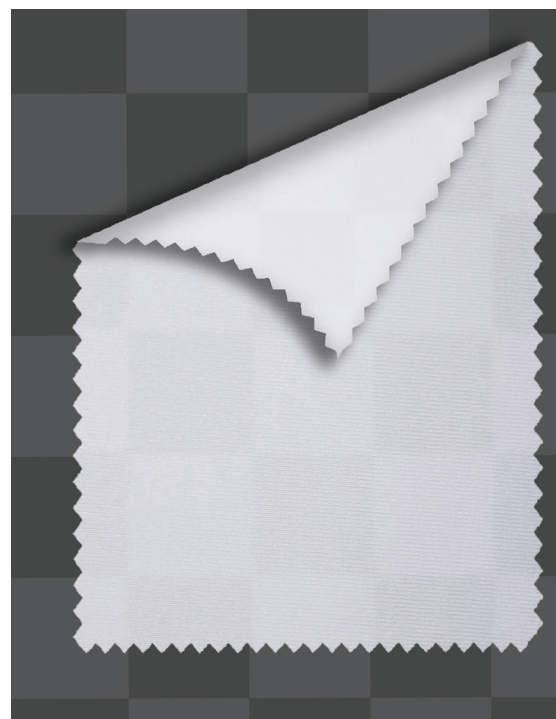
Ink Compatibility

Dye Sub Transfer | Dye Sub Direct | UV

Cutter Compatibility

Any

Shrink (l):	—	
Shrink (w):	—	
Stretch (l):	33.00%	 HIGH
Stretch (w):	11.00%	 LOW
Stretch at Burst (l):	193.00%	 HIGH
Stretch at Burst (w):	115.00%	 MED
Burst Strength (l):	93 lbs/in.	 LOW
Burst Strength (w):	144 lbs/in.	 LOW
Tensile Strength (l):	8 lbs/in.	 LOW
Tensile Strength (w):	8 lbs/in.	 LOW
Burst Strength:	222 lbs	 MED
Yellowing:	1.41 dE	 MED
Max Roll Length:	100m	
Available Recycled:	No	
Available Anti-microbial:	Yes	



NFPA-701 flame retardance certified.

Recommended transfer settings for sublimation are
374°F-410°F for 40-100 seconds at 40psi.